

Catalogue

Ceiling Systems 2026

valid after 09/01/2026

ACOUSTIC TILES
NEW Sandila/N

■ OWAlifetime collection



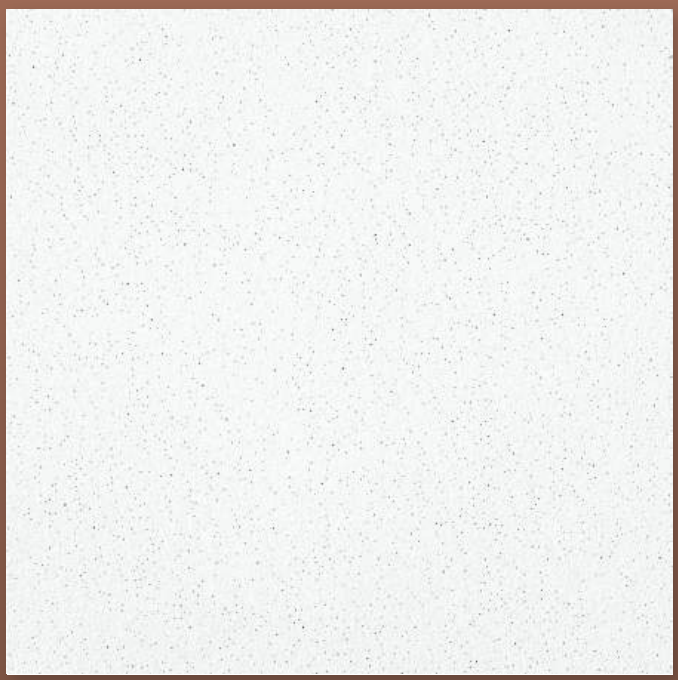

Sound Absorption:	Up to $\alpha_w = 0.60$
Sound Reduction*:	Up to $D_{n,f,w} = 31$ dB
Material:	Mineral Tile
Surface:	Sanded, white, needled
Reaction to Fire:	A2-s1,d0 (EN 13501-1)
Resistance to Fire*:	Up to REI 180 (EN 13501-2)
Humidity Resistance:	Up to 95 % RH, short term
Light Reflection:	Approx 87 (ISO 7724-2, ISO 7724-3)
Recyclability:	100 %
Formaldehyde Emission:	< 5 µg/m³ (ISO 16000)
LEED EQ credit:	TVOC Limit according to CDPH < 50 µg/m³

* Depending on dimension, system, raw ceiling and other additional measures

NEW Sandila/N – Edge 3

3

AVAILABLE SYSTEMS

	Visible				Bandraster	Visible, Wide-Span Profiles
Dimension	S 3	S 3 cliq	S 3 cliq Seismic-Resistant	S 15 cliq	S 18d	Type 8550
	■	■	■	■		■
	■	■	■	■	■	■

STANDARD DIMENSIONS[1] – 15 mm nom. (OWAcoustic premium)

Part no.	Dimension [mm]		PU	Pak/Pal	m²/Pal	α_w	$D_{n,f,w}$
00075469	600 x 600 x 15		12	44	190.08	0.60	31 dB
00075343	625 x 625 x 15		12	40	187.50	0.60	31 dB
00075490	1200 x 600 x 15		10	26	187.20	0.60	31 dB
00075503	1250 x 625 x 15		10	24	187.50	0.60	31 dB

STANDARD DIMENSIONS[1] – 14 mm nom. (OWAcoustic smart)

Part no.	Dimension [mm]		PU	Pak/Pal	m²/Pal	α_w	$D_{n,f,w}$
00075289	600 x 600 x 14		12	48	207.36	0.55	29 dB
00075436	625 x 625 x 14		12	48	225.00	0.55	29 dB
00075437	1200 x 600 x 14		10	30	216.00	0.55	29 dB
00075518	1250 x 625 x 14		10	30	234.37	0.55	29 dB

[1] Further dimensions available upon request